



### KING PIN

2" Flange And 8 Bolt Type King Pin Detachable from Below. 12 Tons Carrying Capacity.

### ELECTRICAL SYSTEM

Led System Front Lambert and Side Position Lamps Suitable for All Truck Vehicles With 2 X 7 And 1 X 15 Socket.

### AIR SUSPENSION

Height adjustment system with lowering and lifting. Parabolic Z springs and shock absorber elements limit excessive axle movement.

### LANDING GEAR

Double Speed 50.000 Kg Carrying and 24.000 Kg Lifting Capacity Mechanical Landing Gears.

### ROOF SYSTEM

50 mm insulated panel with a polyurethane foam core in between two 4 mm wbp plywood sheets. 5 LEDs ceiling light with motion detector.

### FRONT SIDE OF THE BOX

20 mm Fiberglass Reinforced Plywood panel. Vertical steel uprights as reinforcement on the outside.

### SIDES OF THE BOX

The polyurethane sandwich panel is made of 4 mm plywood on both sides and filled with 50 mm thick high-density polyurethane foam in the middle. The surface is protected with a polyurethane white-colored protective layer. 1 row(s) of lashing rail(s) centered at 1000 mm from the floor.

### FLOOR PLATFORM

The floor platform has 30 mm thick imported phenolic resin-coated non-slip plywood



### TOOLBOX

1-unit 80cm toolbox made from plastic material.

### CHASSIS

Reis chassis that is specially produced for the Reis, formed of I-section high-strength steel material by automatic submerged arc welding method. Chassis dipped galvanized or zinc rich, epoxy primer, paint coated.

### AXLES

3 x 9.000kg carrying capacity, Reis Brand or Imported Brands, drum or disc brake type. 3rd axle steering that is fixed in reverse gear position with 30 km and high speed. (optional)

### LIFTING AXLE

A manual or automatic front axle lifting system that prevents tire wear and provides convenience in turns.

### TIRES AND RIMS

6 pcs 385/65/22,5 Tubeless Tires, steel or optional aluminum rims

### BRAKE

Automatic Load Adjustment Valve RSS (Road Stability System) RDC (Ramp Distance Control), ilvl (intelligent pneumatic suspension) 4S3M System (optional)

### MUDGUARDS

Plastic quarter mudguards on the edges and anti-spray in the middle.

### REAR BUMPER

The rear bumper that dipped galvanized (resistant to abrasion and rust)


### REAR DOOR

Sandwich Panel with central locking system and secure door locking handles. Rubber sealing on the edges.

### SPARE WHEEL CARRIER

Reducer or optional basket-type spare tire carrier.



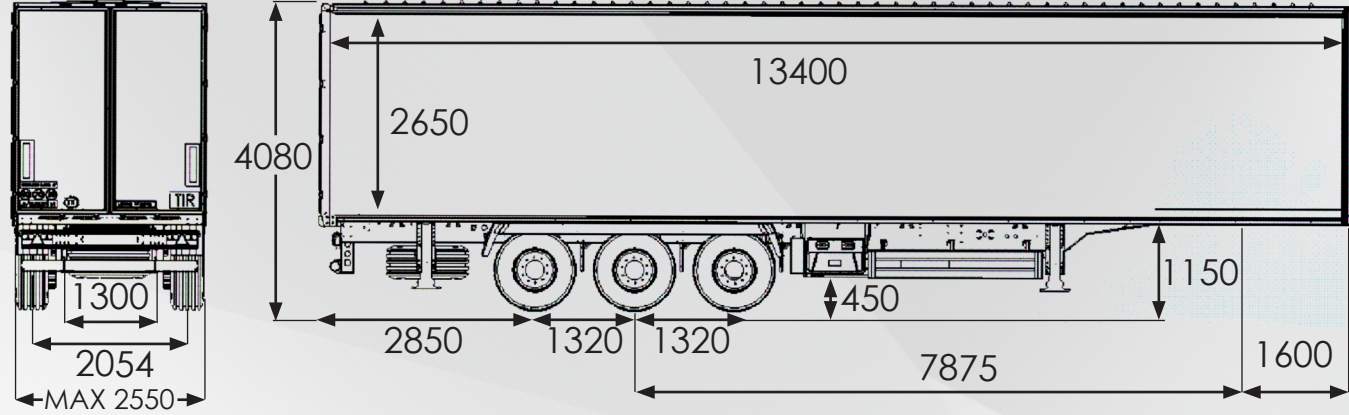

## GENEL TOLERANSLAR

Uzunluk Toleransları (mm)							Yay, Yarıçap ve Kenar Toleransları (mm)				Açı Toleransları (kısakenar uzunluğuna bağlı olarak açı toleransları)				
0,5-3	3-6	6-30	30-120	120-400	400-1000	1000-2000	2000-4000	0,5-3	3-6	6'dan Büyük	10'a kadar	10-50	50-120	120-400	400'den büyük
±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2	±0,2	±0,5	±1	±1	±0°30	0°20	±0-10	±0°5

